


POLYURETHANE (PU TUBING)

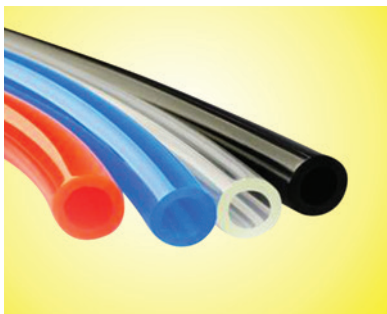

APPLICATIONS

It is widely used in air pressure, vacuum machine, industrial robot, automatic control panel & testing equipment.

FEATURE

- Various colours, easy to identify.
- Excellent flexibility at low temperature.
- Lightweight, easy to design compact type.
- Ultra softness enables to display excellent efficiency in pipping.

MATERIAL

Polyurethane

TEMPERATURE

-20°C to + 80°C

Code	O.D. (mm)	I.D. (mm)	Working / Burst Pressure (bar)	Weight (kg/m)	Length per roll (mt)
PU - 0402	4.0	2.0	8 / 24	0.11	100
PU - 0604	6.0	4.0	8 / 24	0.19	100
PU - 0850	8.0	5.5	8 / 24	0.37	100
PU - 1065	10.0	6.5	8 / 24	0.55	100
PU - 1280	12.0	8.0	8 / 24	0.76	100