


PVC SPRING HOSE

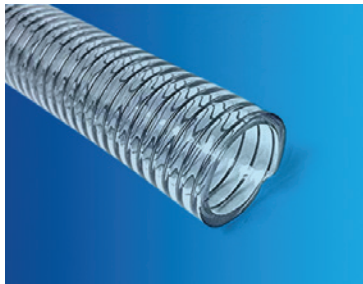

APPLICATIONS

Widely used for conveying water, oil, powder and granular material in factories, agriculture, engineering and construction works.

FEATURE

- Excellent flexibility
- Corrosion and abrasion resistant.
- Oil & chemical resistant.
- Transparent visibility
- Smooth inner construction for unrestricted flow of materials

MATERIAL

Transparent soft PVC with wire helix

TEMPERATURE

-10°C to + 60°C

Code	Nominal Size	I.D. (mm)	O.D. (mm)	Working / Burst Pressure (bar)	Weight (kg/m)	Length per roll (mt)
PSP - 1012	1/2"	12.0	18.0	6 / 15	0.22	100
PSP - 1015	5/8"	15.0	22.0	6 / 15	0.31	100
PSP - 1019	3/4"	19.0	26.0	5 / 12	0.38	50
PSP - 1022	7/8"	22.0	30.0	5 / 12	0.50	50
PSP - 1025	1"	25.0	33.0	5 / 12	0.55	50
PSP - 1032	1 1/4"	32.0	41.0	4 / 10	0.79	40
PSP - 1038	1 1/2"	38.0	48.0	4 / 10	1.03	40
PSP - 1041	1 5/8"	41.0	52.0	4 / 10	1.29	40
PSP - 1048	1 7/8"	48.0	59.0	4 / 10	1.40	40
PSP - 1050	2"	51.0	62.0	4 / 10	1.50	40
PSP - 1065	2 1/2"	63.0	80.0	3 / 8	2.75	20
PSP - 1075	3"	76.0	92.0	3 / 8	3.25	20
PSP - 1100	4"	102.0	120.0	3 / 8	5.00	20
PSP - 1150	6"	152.0	168.0	2 / 5	6.80	20